U-3

Springfield

...the rolls royce of powered lawn and garden equipment

Springfield

SUBURBAN TRACTORS

LAWN TRACTORS

POWER TILLERS

SNOW THROWERS

Celebrating 20 Years of Power Equipment Progress

20th ANNIVERSARY

In twenty years, a manufacturer can accumulate a wealth of knowledge. The manufacturer of Springfield Powered Lawn and Garden Equipment has done just that . . . and the owners of Springfield equipment are enjoying the rewards. Rewards in superior performance, greater comfort and handling ease, longer mechanical life, and the prestige that comes with owning the finest piece of power equipment made today, whether it's a Springfield Suburban Tractor, a Springfield Lawn Tractor, a Springfield Power Tiller or a Springfield Snow Thrower.

A Springfield owner uses his machinery with pride. It's like owning a Rolls Royce, only better, because the enjoyment of handling such a superb piece of machinery goes to the owner and not a chauffeur.

So if you've never tried Springfield, do it today. Like Rolls Royce it's not the least expensive power equipment you can buy. But you pay more because you get more, it works better, and it lasts longer.

And a final whimsical thought for those who follow automotive advertising: **both** Rolls Royce and Ford operate more quietly than Springfield and we admit it...but Springfield sure does a whale of a lot better job in your yard and garden.

POWER and PRESTIGE! Get Them Both with SPRINGFIELD!

MODEL 66CTM

Clean design in style and mechanics make this an outstanding Tractor. 6 H.P., 32" Pin-On rotary mower, dozens of other work-saving features.

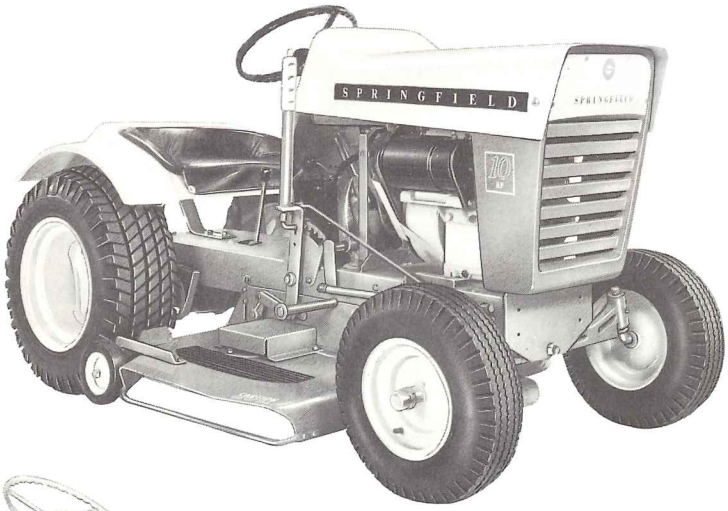

MODELS 66TE-10 & 12

Both are big, one with a 10 H.P., the other a 12 H.P. engine. Electric start is standard, along with dozens of other features. Similar features, styling, on 66TE-8.

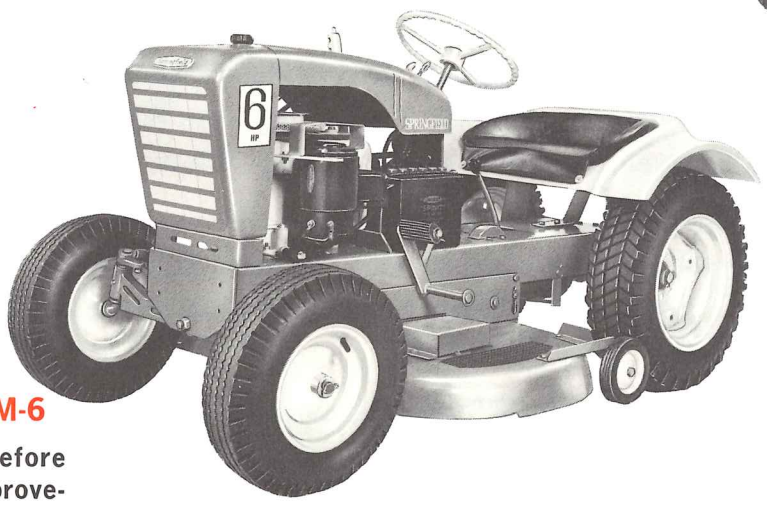

MODEL 66TM-6

It was great before this year's improvements, now it's even greater. 6 H.P., takes 36" Floating rotary mower, and other attachments.

Springfield

SUBURBAN TRACTORS

Be the first "Tractor Chauffeur" in your block!

MODEL 66CTM

Big tractor features, compact price! SPECIFICATIONS: Engine: 4-cycle, 6 h.p. Starter: Recoil or optional electric (No. 66CTME). Transmission: Full-gear automotive type, 3 speeds forward, 1 reverse, full differential. Clutch: Separate control for mower blade and tractor. Speeds: Forward, 2, 4, 5 mph; reverse, 1-3 mph; Brakes: drum-type, one combo brake & clutch pedal; parking brake. Steering: 13″ wheel, 3-1 gear ratio. Wheels: 4; "knee-action" front suspension. Turn Radius: 27″. Tires: Front, 4.10x6 pneumatic; rear, 6.50x8 Terra-Tred, 16″ dia. Wheel Base: 46″; overall, 65″. Height: 34″. Ground Clearance: 8″. Width: 38″. Frame: Welded box-type, 10 ga. steel. Seat: Spring-mounted w/pad.

MODEL 66TM-6

Improved version of most popular ever built. SPECIFICATIONS: Engine: 4-cycle, 6 h.p. Starter: Recoil or optional electric (66TME-6). Transmission: Full-gear, 3 speeds forward, 1 reverse, full differential. Clutch: Separate control for mower blade and tractor. Speeds: Forward, 2, 4, 5 mph; reverse, 1-3 mph. Brakes: Drum-type, one combo brake & clutch pedal; parking brake. Steering: 13″ wheel, 3-1 gear ratio. Wheels 4; "knee action" front suspension. Turn Radius: 27″. Tires: Front, 4.80x8 pneumatic; rear, 6.00x12 "Turf Saver," 24″ dia. Wheel Base: 46″; overall, 65″. Height: 34″. Ground Clearance: 8″. Width: 38″. Frame: Welded box-type, 10 ga. steel. Seat: Fibre-Form w/pad.

MODEL 66TE-8

Plenty of power for plenty of jobs. SPECIFICATIONS: Engine: 4-cycle, 8 h.p. Starter: Electric, Safe-T-Key ignition, 12V system. Transmission: Heavy-duty, full-gear automotive-type, 3 speeds forward, 1 reverse, full differential. Clutch: Separate control for mower blade and tractor. Brake: Drum-type, one combo brake & clutch pedal; parking brake. Steering: 13″ wheel, 3-1 gear ratio. Wheels: 4; "knee action" front suspension. Turn Radius: 27″. Tires: Front, 4.80 x8 pneumatic; rear, 6.00x12 pneumatics, 24″ dia., "Turf Saver." Wheel Base: 46″, overall 65″. Height: 37″. Ground Clearance: 8″. Width: 34″ w/o mower attachment. Frame: Welded box-type, 10 ga. steel. Seat: Fibre-Form w/pad. Same general styling as Mod. 66TE-10.

MODEL 66TE-10 & 12

Two huskies with power to spare. SPECIFICATIONS: Engine: 4-cycle, 10 or 12 h.p. Starter: Safe-T-Key ignition, 12V system. Transmission: Heavy-duty, full-gear automotive type, 4 speeds forward, 1 reverse; full differential. Clutch: Separate control for mower blade and tractor. Brake: Drum-type, one combo brake & clutch pedal; parking brake. Steering: 13″ wheel; 3-1 gear ratio. Wheels: 4; "knee action" front suspension. Turn Radius: 27″. Tires: Front, 4.80 x8 pneumatics; rear, 8.00x12 pneumatic Terra-Tred, 24″ dia. Wheel Base: 46″, overall 65″. Height: 37″. Ground Clearance: 8″. Width: 36″ w/o mower attachment. Frame: Welded box-type, 10 ga. steel. Seat: Fibre-Form w/pad.

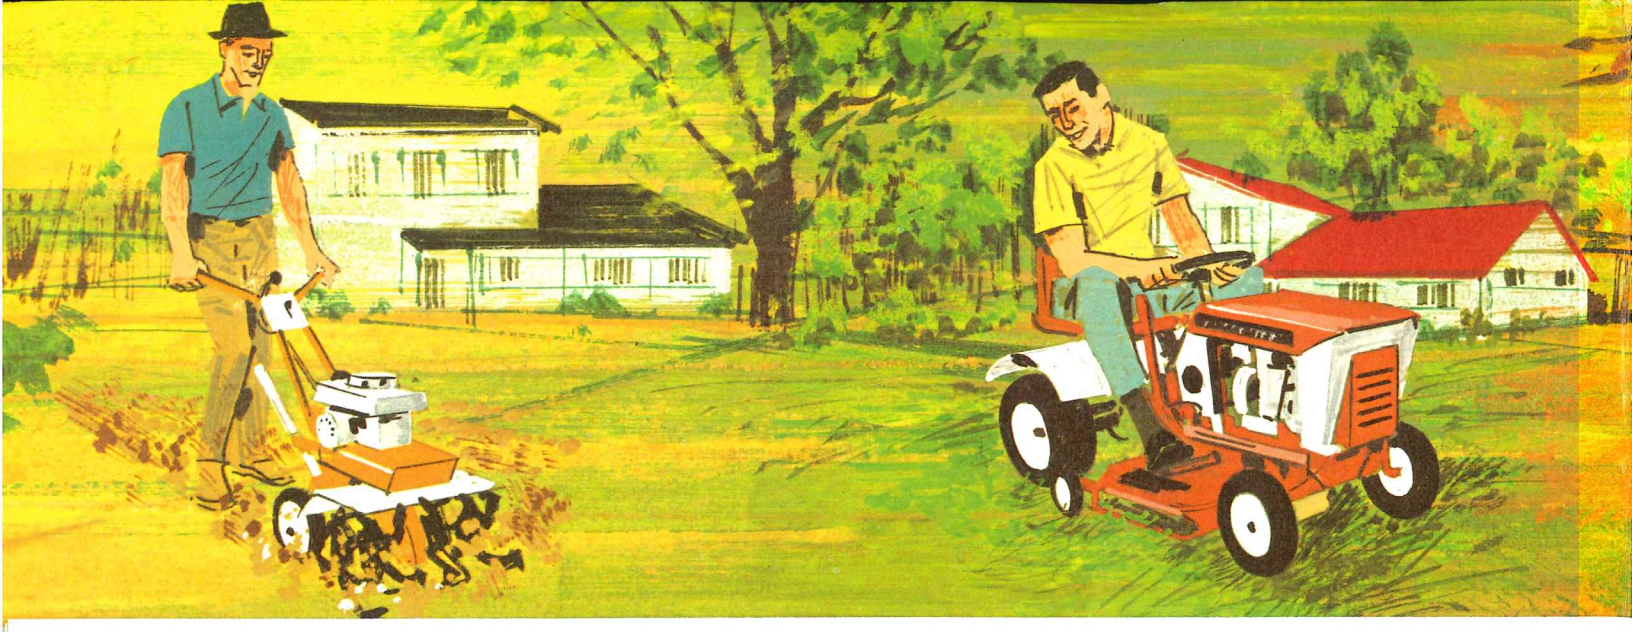

Springfield

LAWN TRACTORS

Proved Year After Year, America's Best Lawn Tractor Buy!

MODEL LT425

Looks like a tractor, works like a tractor. Attachments for year-round use. SPECIFICATIONS: Engine: 4 cycle, 4 h.p. Starter: Recoil type. Transmission: Full Gear type, 2 speeds forward and reverse. Differential. Clutch: Separate controls for blade and tractor. Speeds: Both forward and reverse, 1½ to 5 mph. Cutting Heights: 1½ to 3″ screw-type, any height variation. Cutting Width: Full 25″. Steering: Steering wheel. Turn Radius: 48″. Tires: Front, 2.75x10 semi-pneumatic; rear, 4.10x6 pneumatic. Frame: Channel type. Wheel Base: 34″, overall length, 48½″. Seat: Spring-mounted comfort type. Brake: Friction-type, foot-operated.

MODEL LT525

More power to go with your prestige. Four season attachments for this Springfield, too. SPECIFICATIONS: Engine: 4-cycle 5 h.p. Starter: Recoil type. Transmission: Full gear, automotive type, full differential. Clutch: Separate controls for blade and tractor. Speeds: 2, 3½, 5 mph forward, 3 mph reverse. Cutting Width: Full 25″. Cutting Height: 1½, 2, 2½, 3, 3½″ with push-button Rite-Hite selector. Brake: Drum-type, foot-operated. Steering: Handlebar. Wheels: 4, with "knee-action" front suspension. Tires: Front, 2.75x10 semi-pneumatic; rear, 4.10x6 pneumatic. Turn Radius: 26″. Frame: Welded box-type, 10 ga. steel. Wheel Base: 34″, overall length 46″. Seat: Spring-mounted comfort-type. Available with electric start, Model LT525E.

MODEL LT632

If it's power you want, then power you get in this model. SPECIFICATIONS: Engine: 4-cycle, 6 h.p. Starter: Recoil type. Transmission: Full gear, automotive type, full differential. Clutch: Separate controls for blade and tractor. Speeds: 2, 3½, 5 mph forward, 3 mph reverse. Cutting Width: Full 32″. Cutting Height: 1½, 2, 2½, 3, 3½″ with push-button Rite-Hite selector. Steering: Handlebar. Wheels: 4, with knee-action front suspension. Brake: Drum-type, foot-operated. Tires: Front, 2.75x10 semi-pneumatic; rear, 4.10x6 pneumatic. Turn Radius: 26″. Frame: Welded box-type, 10 ga. steel. Wheel Base: 34″, overall length 46″. Seat: Spring-mounted comfort type. Available with electric start, Model LT632E.

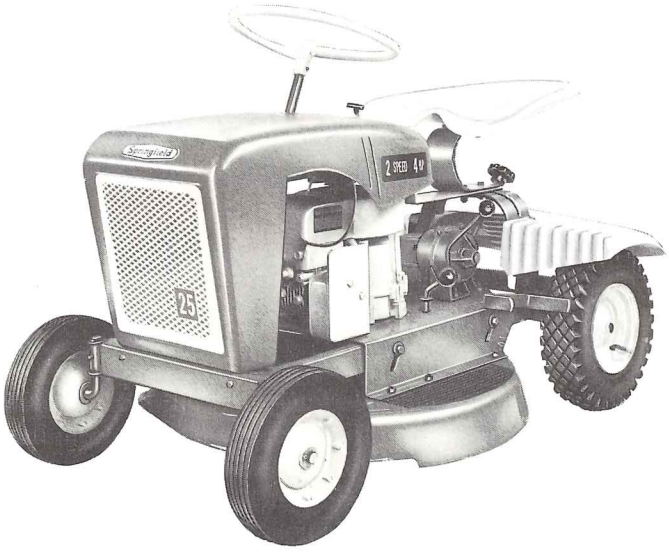

MODEL LT425

Lots of muscle for a little guy . . . and virtually every feature found on larger lawn tractors.

MODEL LT525

Full of features and performance. Provides power for year-round range of attachments, too.

MODEL LT632

Absolutely the best possible choice for the family with a fairly large yard to maintain.

MODEL 65HTR-3

Ideal for the light gardener, with a small garden and flower beds to be tilled.

MODEL 65VTR-35

A little more power, a lot more performance. Like all Springfields, it features a power reverse.

Attachments to make your Springfield Tiller even more valuable include a cultivator with hilling sweeps (No. 60TH) and a furrowing tool and attachments bracket (No. 60TF). Also available, 2" furrowing tool, fits any tiller made (No. 63TF); two 12x3 tiller transport wheels (No. 62TTW). Tine extensions to 38" (64TTE).

MODEL 66HTR-4-V

Capable of handling most jobs. 4 h.p., horizontal drive, and the new Hi-Lo tine speed.

MODEL 66HTR-5-V

Higher horsepower (5) for heavier soils and harder jobs. Also has Hi-Lo tine speed feature.

Springfield

POWER TILLERS

America's most popular because it's America's best!

MODEL 65HTR-3

Virtually every feature found on higher-priced tillers. SPECIFICATIONS: Engine: 4-cycle, 3 h.p. Starter: Recoil. Throttle: On handlebar. Clutch: Single over-center clutch lever for forward, neutral, reverse. Handlebars: Heavy-duty steel. Transmission: Worm; steel hardened and ground and bronze alloy worm wheel, runs in oil. Bearings: Needle bearings for tine shaft, Timken bearings for worm shaft. Depth Bar: Hinged for easy operation, adjustable 0-8″. Transport Wheels: 2.10″x1.75 semi-pneumatic. Tiller Tines: High carbon forged steel, heat treated for hardness, guaranteed for life against breakage, 16 blades, 14″ dia., adjustable width (no tools), 26″ std.

MODEL 65VTR-35

Vertical drive, slightly more horsepower. SPECIFICATIONS: Engine: 3½ h.p. Starter: Recoil. Throttle: On handlebar. Clutch: Single over-center clutch lever for forward, neutral, reverse. Handlebars: Heavy-duty steel. Transmission: Worm; steel hardened and ground and bronze alloy worm wheel, runs in oil. Bearings: Needle bearings for tine shaft, Timken bearings for worm shaft. Depth Bar: Hinged for easy operation, adjustable 0-8″. Transport Wheels: 2.10″x1.75 semi-pneumatic. Tiller Tines: High carbon forged steel, heat treated for hardness, guaranteed for life against breakage, 16 blades, 14″ dia., adjustable width (no tools), 26″ std.

MODEL 66HTR-4-V

Horizontal drive and Hi-Lo tine speed for maximum efficiency in either ground-breaking or cultivating. SPECIFICATIONS: Engine: 4-cycle, 4 h.p. Starter: Recoil. Throttle: On handlebar. Clutch: Single over-center clutch lever for forward, neutral, reverse. Handlebars: Heavy-duty steel. Transmission: Worm; steel hardened and ground and bronze alloy worm wheel, runs in oil. Bearings: Needle bearings for tine shaft, Timken bearings for worm shaft. Depth Bar: Hinged for easy operation, adjustable 0-8″. Transport Wheels: 2.10″x1.75 semi-pneumatic. Tiller Tines: High carbon forged steel, heat treated for hardness, guaranteed for life against breakage, 16 blades, 14″ dia., adjustable width (no tools), 26″ std.

MODEL 66HTR-5-V

Enough horsepower for the heaviest tilling jobs. SPECIFICATIONS: Engine: 4-cycle, 5 h.p. Starter: Recoil. Throttle: On handlebar. Clutch: Single over-center clutch lever for forward, neutral, reverse. Handlebars: Heavy-duty steel. Transmission: Worm; steel hardened and ground and bronze alloy worm wheel, runs in oil. Bearings: Needle bearings for tine shaft, Timken bearings for worm shaft. Depth Bar: Hinged for easy operation, adjustable 0-8″. Transport Wheels: 2.10″x1.75 semi-pneumatic. Tiller Tines: High carbon forged steel, heat treated for hardness, guaranteed for life against breakage, 16 blades, 14″ dia., adjustable width (no tools), 26″ std.

Springfield

SNOW THROWERS

Save your health, your time, and your temper!

MODEL 65ST-3

Adequate for snow removal for 80% of United States homes. Has 20 inches of cleaning width, so that average (36″) sidewalk can be cleared in two passes. Offers most of the features found in more expensive, heavier-duty machines. Positive chain drive. Rapid-rotor auger takes healthy bites of snow (up to 400 shovels per minute) and feeds them through chute adjustable 120°. Winterized engine. Self-propelled. Stone deflector for safer operation in gravelled areas. SPECIFICATIONS: Engine: 4-cycle, 3 h.p. Starter: Recoil. Clearing Width: 20″. Movement: Self-propelled. Chute Size: 6″ dia. Chute Discharge Area: 28.2 sq. in. Chute Direction & Control: 120°, lever. Drive: Chain & sprocket. Engine Shield: Heavy-duty steel, hinged for access. Wheels: 8″. Tires: Traction grip. Auger: 12″, high carbon steel shear pin. Auger speed: 1200 r.p.m. Front Suspension: 3″ metal wheel. Front Height Adj.: 0-3/4″. Bearings: Oil-impregnated bronze. Lubrication: Zerk fittings. Drive Chain: 1/2″ pitch, #41 covered. Speed: 1 1/2 mph.

MODEL 65ST-4

Tried and proven in unusually heavy snows. 4 h.p., self-propelled forward and reverse. Controls, mounted on waist-high panel for convenient use, include throttle, clutch, shift and chute adjustment (infinite positions through 180°). Positrac tires for sure operation on ice. Full gear transmission. Clears 20″ path. Exclusive auger design gulps even crusted snow as fast as 450 shovels per minute, throws it up to 25 feet. SPECIFICATIONS: Engine: 4-cycle, 4 h.p. Starter: Recoil. Clearing Width: 20″. Movement: Self-propelled forward & reverse. Reverse: Friction disc. Drive: Gear transmission, permanent lube. Auger Clutch: Separate. Chute Size: 6″. Chute Discharge Area: 28.2 sq. in. Chute Direction & Control: 180° locking cable. Auger Clutch: Separate, control on console. Engine Shield: Heavy-duty steel, hinged for access. Wheels: 10″. Tires: 10.00 x 2.75 Positrac. Auger: 12″, high carbon steel shear pin. Auger Speed: 1200 r.p.m. Front Suspension: Combination 3″ metal wheel and skid. Front Height Adj.: 0-1/2-1″. Belts: Poly "V." Bearings: Oil-impregnated bronze. Lubrication: Zerk fittings on both axle and auger. Drive Chain: 1/2″ pitch, #41 covered. Speed. 1 1/2 mph.

MODEL 65ST-3

A life-saver, literally. Can eliminate heart-straining snow shoveling for 80% of U.S. homes.

MODEL 65ST-4

Rugged and ready for heavy, crusted snows. Proved in snow-heavy U. S. areas.

OTHER SPRINGFIELD SNOW REMOVAL EQUIPMENT

Next to hibernating 'til Spring, the best way to avoid snow problems is to arm yourself with Springfield Snow Removal equipment. In addition to the snow-tested Springfield Snow Throwers pictured here, there are highly-efficient attachments for Springfield Suburban and Lawn Tractors. For tractors in the lower horsepower ranges, a 30″ blade is available. Larger tractors can use a 36″ or a 42″ blade. In addition, a self-powered snow thrower with 36″ cleaning width is available for the 6 h.p. Suburban Tractor, with a 36″ snow thrower operating from a power takeoff available for the 8, 10 and 12 h.p. Suburban Tractors. Snow problem? No problem at all when you're a Springfield owner!

Springfield ATTACHMENTS

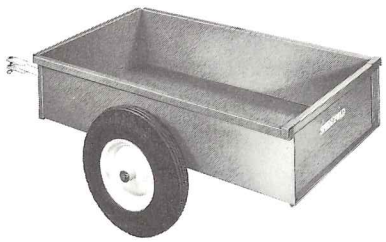

Cart. Steel. 26″ wide, 42″ long, 12⅞″ deep, Cap.: 8.2 cu. ft. No. 61YC.

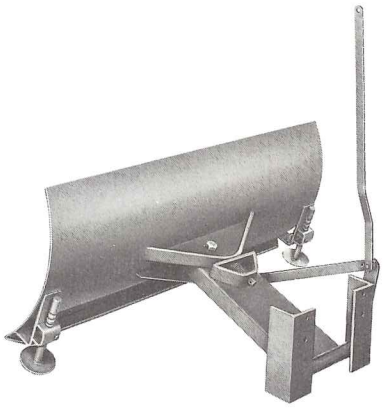

Dozer Blade. Lifting lever operates from seat. 42″ width. Good for snow removal, too. No. 64TSB.

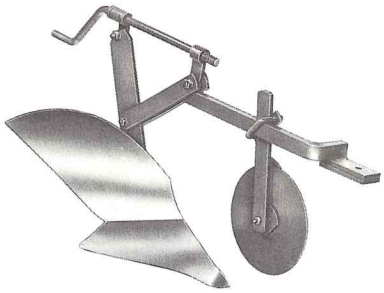

Plow. 8″ or 10″ turning plow with coulter attachment. No. 61TP (8″), No. 64TP-10 (10″).

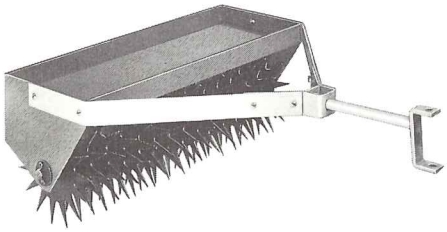

Aerator. Heavy-duty spikes. Shelf for weights if needed. No. 62LA.

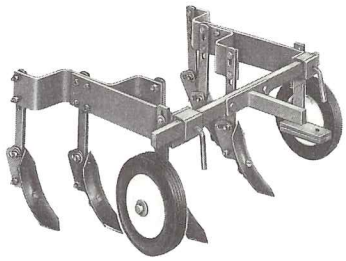

Cultivator. All-steel construction. Six 2x8 shovels. Attaches without tools. No. 61TC.

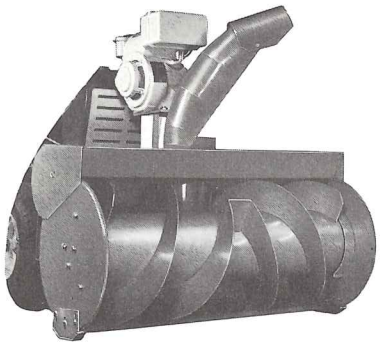

Snow Thrower: 66T takes self-powered 5 h.p. thrower with winterized engine, 36″ width. Larger models use 66SB operated from PTO.

More than 20 attachments for 4-season work-saving

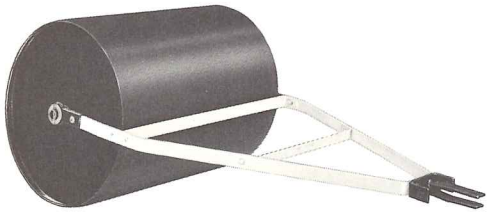

Roller. All steel. Water filled. 24″ width, 18″ diameter. Quick-hitch attachment. No. 62LR.

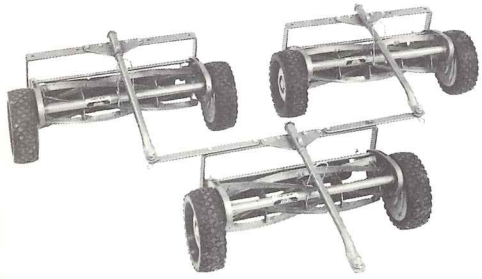

Gang Mower. 3 reel-type 21″ units with hitch. Wide tread semi-pneumatic tires. No. 61GM.

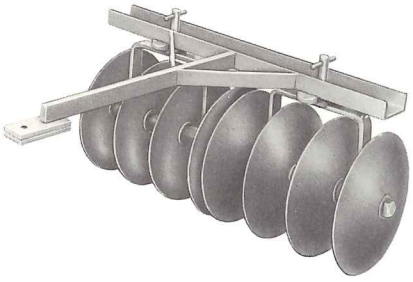

Disc Harrow. Heavy-duty agricultural type. Free running. No. 61TD.

Tiller Attachment. 4 h.p. 26″ of 14″ bolo tines No. 64TTA. Attaches to tractor with universal hitch No. 64STH.

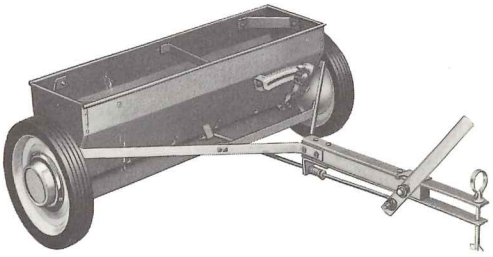

Spreader. For seed, fertilizer, etc. Adjustable discharge slots. 36″ width. No. 61LS.

Rotary Mower. 36″ with floating deck fits 66T models. No. 66RMT. 42″ width (pin-on deck) for 66TE8-10-12 only. No. 66RMT 42. **Sickle Bar.** Available from your dealer. **Universal Hitch.** For use with plow, disc harrow, cultivator. No. 64STH. **Wheel Weights.** No. 61TW. **Tire Chains.** For 6 & 8 h.p. No. 62TTC. For 10 & 12 h.p. No. 64TTC. **Lawn Sweeper.** 30″ or 86″ trailing sweeper available from your dealer. **Winterizing Cab.** Fits all Springfield Suburban Tractors. Available from Original Tractor Cab Co., Inc., Arlington, Ind. **Hudson "Trail-N-Spray"** Model No. 42254, suited for use with all Springfield Tractors. Available from H.D. Hudson Mfg. Co., Chicago, Ill.

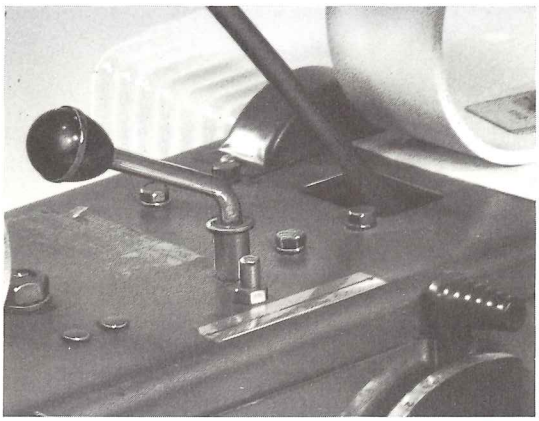

Separate Blade Clutch. For safety and convenience, stops blade action rapidly. Permits safer tractor transportation and attachment usage.

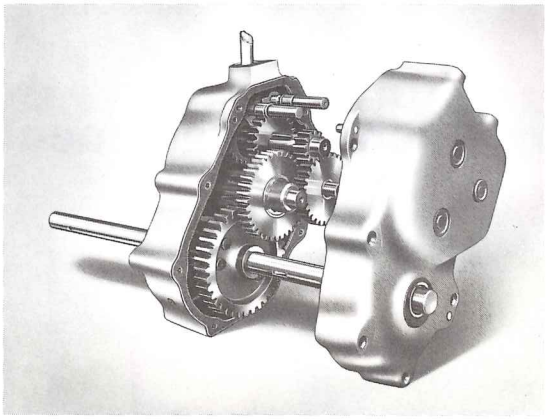

Automotive-Type Transmission. Includes differential. Heat-treated gears run in oil. As ruggedly dependable as transmission on your automobile.

Gas Gauge. Ever tinker with a stalled engine only to find it needs gas? Not with Springfield. Gauge is direct-reading flotation type for accuracy.

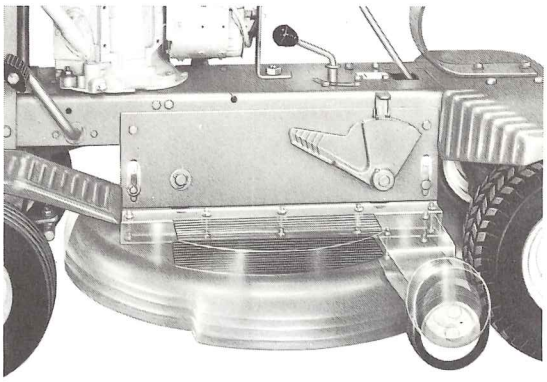

Floating Deck. Designed to "float" with ground contour and prevent "scalping." Assures even cut for better lawn appearance. On all but lowest-priced model.

Springfield

FEATURES

Springfield equipment is better...by design!

Suburban Tractors

Rugged construction is your assurance of a lifetime return on your Springfield investment. Exclusive Pow-R-Gear drive (on most models) eliminates virtually all problems usually associated with belt drives. Engineering and styling make Springfield a delight to own and operate. America's Best Suburban Tractor Buy!

Lawn Tractors

These are the natural evolvement from famous Springfield Riding Rotary Mowers . . . for years the most popular riding mowers in the country. In riding and handling ease they are unbeatable. Cutting height adjustments work simply . . . and the entire Springfield machine works nobly. America's Best Lawn Tractor Buy!

Snow Throwers

No other snow removal equipment in the U. S. offers so many exclusive features as Springfield. Their extremely simple but effective auger design alone eliminates dozens of possible mechanical trouble areas . . . all the while providing unusually effective snow throwing. See it. America's Best Snow Thrower Buy!

Power Tillers

Others have tried to imitate Springfield Power Tiller engineering, but without success. They, too, have been the top seller for years. Exclusive balanced design make them the hardest workers and easiest handlers anywhere. Exclusive Quick Tine Change works without tools. America's Best Power Tiller Buy!

SPRINGFIELD GUARANTEE

Each new Springfield product is guaranteed free from defect in material and workmanship, under normal non-commercial use and service, for one year from the date of purchase. Quick Manufacturing, Inc., will replace FOB its factory any part or parts found by it on inspection to be defective, after delivery to Quick of the claimed defective part, prepaid. Engines, belts, tires, tubes and trade accessories carry their own manufacturer's guarantee.

Through normal wear, any mechanical equipment may at times develop malfunctions. Quick service is available throughout the U. S. and Canada.

Since the latest in design and engineering advances constantly are being adapted to Springfield equipment, prices and specifications are subject to change without notice.

Whatever Your Power Equipment Needs, Springfield Has The Best Answer!

LAWN TRACTORS

Pick any one of three models and know you've picked the very best. In 4, 5 or 6 h.p., the first two with amazing Springfield Kwik-Kut 25″ rotary mower, the 6 h.p. with 32″ cutting width.

SUBURBAN TRACTORS

Most complete line in the U. S. Five models: two in 6 h.p., one each in 8, 10, and 12 h.p. Every one of them the outstanding result of 20 years of power equipment achievement!

POWER TILLERS

Used by more people than any other because more people have found them superior. Four models, in 3, 3½, 4 and 5 h.p. Higher h.p. units feature Hi-Lo dual tine speeds, all are outstanding!

COMPACT TRACTOR

Part of the Suburban Tractor line, but a special 20th Anniversary design and price. 6 h.p., new Pow-R-Gear drive, Pin-On rotary mower attachments and dozens of "big tractor" features. Works as good as it looks!

SPRINGFIELD POWER EQUIPMENT STYLED BY KURT BOEHM & ASSOCIATES

Springfield

Quick Manufacturing, Inc. The House of Power • Springfield, Ohio

Form No. 166-65 Litho U.S.A.